

JOANNE - J.F. FABRICS

PRODUCT INFORMATION

Montebello



Montebello

Refinement, Sophistication, Elegance & Luxury.

Just a few words to describe one of the trends for 2004 'Emphasis on Details'.

This collection addresses our love of beautiful fine fabrics, that are as luxurious to touch, as they are pleasing to our eyes. The color, texture, and details of these designs will inspire you!

Gone are the days when we had to address practicality before beauty! The engineering of fabrics today allow us to have both the elegance and exquisite designs we crave, with the wearability our busy lives demand. Let your creativity and imagination flow and have your home reflect the beauty in your soul.

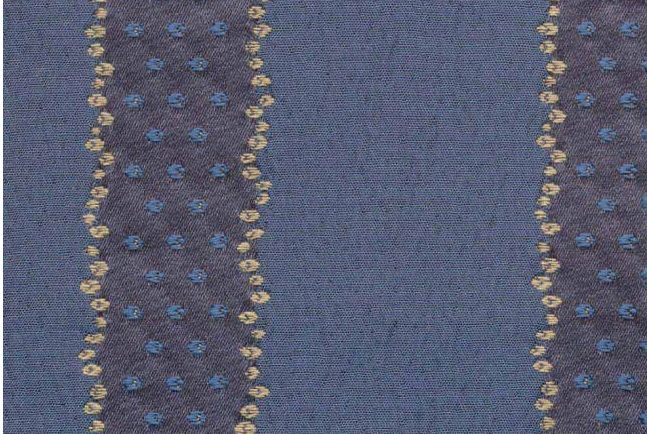

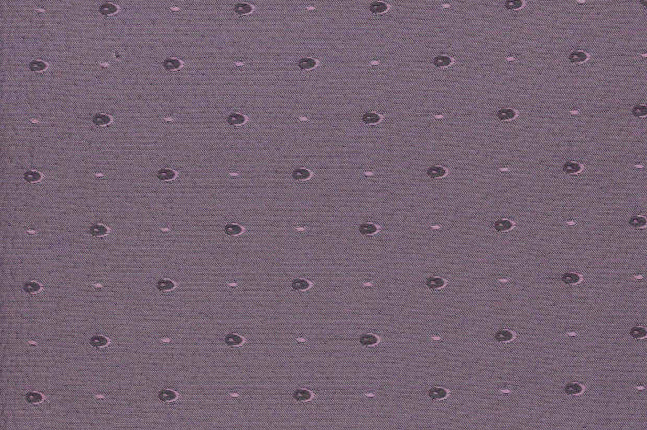
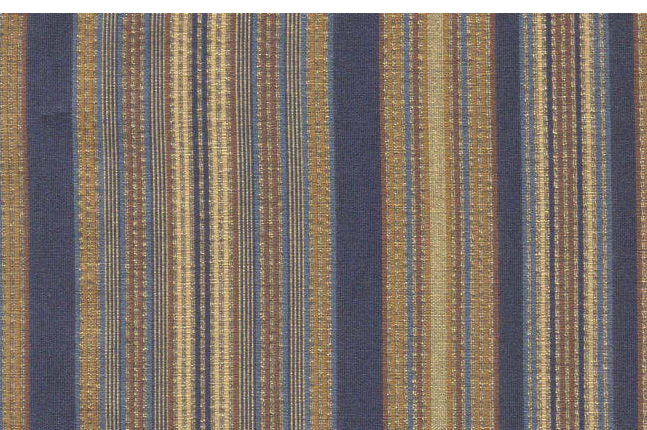
Allow yourself to be surrounded by the classical elegance of these designs that range from magnificent floral jacquards, silky luxurious plaids, a whimsical camel to an absolutely stunning paisley.

All patterns are **EXCLUSIVE** to Joanne Fabrics & J.F.Fabrics. Please also note that 6 patterns are photographed in black and white at the back of the book showing their full pattern repeats. We have also re-sampled Darcy, Monaco, Taipei and Tuscany.

They are as follows:

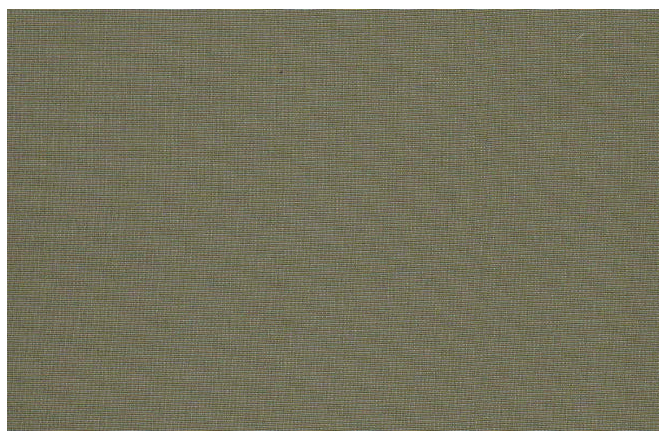

Darcy	(1 sku re-sampled)
Monaco	(18 skus re-sampled)
Taipei	(4 skus re-sampled)
Tuscany	(8 skus re-sampled)



	<p>PATTERN</p> <p>Number of Cols. 4 Content 44% P, 31% R, 25% V Country of Origin Italy Width 55" - 140 cm Vertical 5.5" (14 cm) Horizontal 4.625" (11.7 cm) Railroaded No Weight (oz/lb yd) 11.6 Finish N/A Care Code S Flammability UFAC Class I, Cal. 117 & MVSS302 Surface Abrasion 20,000 DR Wyzenbeek Cotton Duck Tear Strength N/A Tensile Strength N/A Seam Slippage N/A Breaking Strength N/A Colorfastness to Light N/A Crocking N/A Pilling N/A</p>	<p>BENJAMIN</p> <p>4 44% P, 31% R, 25% V Italy 55" - 140 cm 5.5" (14 cm) 4.625" (11.7 cm) No 11.6 N/A S UFAC Class I, Cal. 117 & MVSS302 20,000 DR Wyzenbeek Cotton Duck N/A N/A N/A N/A N/A N/A</p>
	<p>PATTERN</p> <p>Number of Cols. 10 Content 85% R, 15% P Country of Origin USA Width 54" - 137 cm Vertical 10.875" (27.6 cm) Horizontal 13.5" (34.3 cm) Railroaded No Weight (oz/lb yd) 11.4 Finish Teflon Care Code S Flammability UFAC Class I, Cal. 117 & NFPA 260 Surface Abrasion 21,000 DR Wyzenbeek Cotton Duck Tear Strength Warp: 11 lbf, Filling: 24 lbf Tensile Strength Warp: 90 lbf, Filling: 161 lbf Seam Slippage Warp: 31 lbf, Filling: 49 lbf Breaking Strength Warp: 90 lbf, Filling: 161 lbf Colorfastness to Light Class 5 Crocking Wet: Class 4, Dry: Class 5 Pilling 3.5</p>	<p>CEZANNE</p> <p>10 85% R, 15% P USA 54" - 137 cm 10.875" (27.6 cm) 13.5" (34.3 cm) No 11.4 Teflon S UFAC Class I, Cal. 117 & NFPA 260 21,000 DR Wyzenbeek Cotton Duck Warp: 11 lbf, Filling: 24 lbf Warp: 90 lbf, Filling: 161 lbf Warp: 31 lbf, Filling: 49 lbf Warp: 90 lbf, Filling: 161 lbf Class 5 Wet: Class 4, Dry: Class 5 3.5</p>
	<p>PATTERN</p> <p>Number of Cols. 4 Content 44% P, 31% R, 25% V Country of Origin Italy Width 55" - 140 cm Vertical 1.625" (4.1 cm) Horizontal 1.75" (4.4 cm) Railroaded No Weight (oz/lb yd) 11.6 Finish N/A Care Code S Flammability UFAC Class I, Cal. 117 & MVSS302 Surface Abrasion 15,000 DR Wyzenbeek Cotton Duck Tear Strength N/A Tensile Strength N/A Seam Slippage N/A Breaking Strength N/A Colorfastness to Light N/A Crocking N/A Pilling N/A</p>	<p>COLE</p> <p>4 44% P, 31% R, 25% V Italy 55" - 140 cm 1.625" (4.1 cm) 1.75" (4.4 cm) No 11.6 N/A S UFAC Class I, Cal. 117 & MVSS302 15,000 DR Wyzenbeek Cotton Duck N/A N/A N/A N/A N/A N/A N/A</p>
	<p>PATTERN</p> <p>Number of Cols. 1 Content 85% R, 14% P, 1% S Country of Origin USA Width 54" - 137 cm Vertical 7.5" (19.1 cm) Horizontal N/A Railroaded Yes Weight (oz/lb yd) 11.4 Finish Teflon Care Code S Flammability UFAC Class I, Cal. 117 & NFPA 260 Surface Abrasion 15,000 DR Wyzenbeek Cotton Duck Tear Strength Warp: 4 lbf, Filling: 13 lbf Tensile Strength Warp: 84 lbf, Filling: 129 lbf Seam Slippage Warp: 45 lbf, Filling: 56 lbf Breaking Strength Warp: 84 lbf, Filling: 129 lbf Colorfastness to Light Class 4 Crocking Wet: Class 4, Dry: Class 5 Pilling Class 5</p>	<p>DARCY (re-sampled)</p> <p>1 85% R, 14% P, 1% S USA 54" - 137 cm 7.5" (19.1 cm) N/A Yes 11.4 Teflon S UFAC Class I, Cal. 117 & NFPA 260 15,000 DR Wyzenbeek Cotton Duck Warp: 4 lbf, Filling: 13 lbf Warp: 84 lbf, Filling: 129 lbf Warp: 45 lbf, Filling: 56 lbf Warp: 84 lbf, Filling: 129 lbf Class 4 Wet: Class 4, Dry: Class 5 Class 5</p>

	<p>PATTERN Number of Cols. Content Country of Origin Width Vertical Horizontal Railroaded Weight (oz/In yd) Finish Care Code Flammability Surface Abrasion Tear Strength Tensile Strength Seam Slippage Breaking Strength Colorfastness to Light Crocking Pilling</p>	<p>DOUCET 8 75% R, 25% P USA 54" - 137 cm 19.5" (49.5 cm) 9.5" (22.9 cm) No 10 N/A S UFAC Class I, Cal. 117 & NFPA 260 18,000 DR Wyzenbeek Cotton Duck Warp: 7 lbf, Filling: 19 lbf Warp: 181 lbf, Filling: 169 lbf Warp: 33 lbf, Filling: 53 lbf Warp: 181 lbf, Filling: 169 lbf Class 5 Wet: Class 4, Dry: Class 5 Class 3</p>
	<p>PATTERN Number of Cols. Content Country of Origin Width Vertical Horizontal Railroaded Weight (oz/In yd) Finish Care Code Flammability Surface Abrasion Tear Strength Tensile Strength Seam Slippage Breaking Strength Colorfastness to Light Crocking Pilling</p>	<p>KESSLER 11 75% P, 25% S USA 54" - 137 cm 4.625" (11.75 cm) 2.5" (6.4 cm) Yes 5.4 N/A S UFAC Class I, Cal. 117 & NFPA 260 39,000 DR Wyzenbeek Cotton Duck Warp: 6 lbf, Filling: 11 lbf Warp: 126 lbf, Filling: 72 lbf Warp: 29 lbf, Filling: 56 lbf Warp: 126 lbf, Filling: 72 lbf Class 5 Wet: Class 4, Dry: Class 5 Class 5</p>
	<p>PATTERN Number of Cols. Content Country of Origin Width Vertical Horizontal Railroaded Weight (oz/In yd) Finish Care Code Flammability Surface Abrasion Tear Strength Tensile Strength Seam Slippage Breaking Strength Colorfastness to Light Crocking Pilling</p>	<p>LEONARDO 13 54% P, 43% R, 3% S USA 54" - 137 cm N/A 4.75" (12.1 cm) No 10.8 N/A S UFAC Class I, Cal. 117 & NFPA 260 18,000 DR Wyzenbeek Cotton Duck Warp: 14 lbf, Filling: 25 lbf Warp: 54 lbf, Filling: 68 lbf Warp: 37 lbf, Filling: 44 lbf Warp: 54 lbf, Filling: 68 lbf Class 5 Wet: Class 4, Dry: Class 5 Class 4.5</p>
	<p>PATTERN Number of Cols. Content Country of Origin Width Vertical Horizontal Railroaded Weight (oz/In yd) Finish Care Code Flammability Surface Abrasion Tear Strength Tensile Strength Seam Slippage Breaking Strength Colorfastness to Light Crocking Pilling</p>	<p>MATISSE 13 54% P, 43% R, 3% S USA 54" - 137 cm 26.25" (66.8 cm) 13.5" (34.3 cm) No 10.8 N/A S UFAC Class I, Cal. 117 & NFPA 260 18,000 DR Wyzenbeek Cotton Duck Warp: 15 lbf, Filling: 22 lbf Warp: 201 lbf, Filling: 116 lbf Warp: 35 lbf, Filling: 31 lbf Warp: 201 lbf, Filling: 116 lbf Class 5 Wet: Class 4, Dry: Class 5 Class 4.5</p>

	<p>PATTERN</p> <p>Number of Cols. Content Country of Origin Width Vertical Horizontal Railroaded Weight (oz/in yd) Finish Care Code Flammability Surface Abrasion Tear Strength Tensile Strength Seam Slippage Breaking Strength Colorfastness to Light Crocking Pilling</p>	<p>MONACO (re-sampled)</p> <p>18 85% R, 15% P USA 54" - 137 cm N/A N/A No 6.9 Teflon S UFAC Class I, Cal. 117 & NFPA 260 15,000 DR Wyzenbeek Cotton Duck Warp: 4 lbf, Filling: 9 lbf Warp: 78 lbf, Filling: 105 lbf Warp: 27 lbf, Filling: 45 lbf Warp: 78 lbf, Filling: 105 lbf Class 5 Wet: Class 4, Dry: Class 5 Class 4.5</p>
	<p>PATTERN</p> <p>Number of Cols. Content Country of Origin Width Vertical Horizontal Railroaded Weight (oz/in yd) Finish Care Code Flammability Surface Abrasion Tear Strength Tensile Strength Seam Slippage Breaking Strength Colorfastness to Light Crocking Pilling</p>	<p>MONET</p> <p>8 52% R, 44% P, 4% S USA 54" - 137 cm 13.75" (35 cm) 13.5" (34.3 cm) No 8.7 N/A S UFAC Class I, Cal. 117 & NFPA 260 18,000 DR Wyzenbeek Cotton Duck Warp: 7 lbf, Filling: 18 lbf Warp: 103 lbf, Filling: 87 lbf Warp: 42 lbf, Filling: 60 lbf Warp: 103 lbf, Filling: 87 lbf Class 5 Wet: Class 4, Dry: Class 5 Class 5</p>
	<p>PATTERN</p> <p>Number of Cols. Content Country of Origin Width Vertical Horizontal Railroaded Weight (oz/in yd) Finish Care Code Flammability Surface Abrasion Tear Strength Tensile Strength Seam Slippage Breaking Strength Colorfastness to Light Crocking Pilling</p>	<p>PICASSO</p> <p>2 73% R, 27% P USA 54" - 137 cm 3.5" (8.9 cm) 2.375" (5.8 cm) No 9.4 N/A S UFAC Class I, Cal. 117 & NFPA 260 15,000 DR Wyzenbeek Cotton Duck Warp: 7 lbf, Filling: 19 lbf Warp: 189 lbf, Filling: 169 lbf Warp: 33 lbf, Filling: 53 lbf Warp: 189 lbf, Filling: 169 lbf Class 5 Wet: Class 4, Dry: Class 5 Class 3</p>
	<p>PATTERN</p> <p>Number of Cols. Content Country of Origin Width Vertical Horizontal Railroaded Weight (oz/in yd) Finish Care Code Flammability Surface Abrasion Tear Strength Tensile Strength Seam Slippage Breaking Strength Colorfastness to Light Crocking Pilling</p>	<p>SALVADOR</p> <p>6 74% R, 23% P, 3% S USA 54" - 137 cm 8.875" (22.5 cm) 9" (22.9 cm) No 11.4 N/A S UFAC Class I, Cal. 117 & NFPA 260 21,000 DR Wyzenbeek Cotton Duck Warp: 6.5 lbf, Filling: 18.2 lbf Warp: 61.7 lbf, Filling: 54.9 lbf Warp: 31.4 lbf, Filling: 48.3 lbf Warp: 61.7 lbf, Filling: 54.9 lbf Class 5 Wet: Class 4, Dry: Class 5 Class 3</p>

	<p>PATTERN Number of Cols. Content Country of Origin Width Vertical Horizontal Railroaded Weight (oz/in yd) Finish Care Code Flammability Surface Abrasion Tear Strength Tensile Strength Seam Slippage Breaking Strength Colorfastness to Light Crocking Pilling</p>	<p>TAIPEI (re-sampled) 4 85% R, 15% P USA 54" - 137 cm N/A N/A No 6.7 Teflon S UFAC Class I, Cal. 117 & NFPA 260 15,000 DR Wyzenbeek Cotton Duck Warp: 4 lbf, Filling: 9 lbf Warp: 101.9 lbf, Filling: 162.9 lbf Warp: 42.9 lbf, Filling: 67.2 lbf Warp: 101.9 lbf, Filling: 162.9 lbf Class 5 Wet: Class 3.5, Dry: Class 5 Class 4.5</p>
	<p>PATTERN Number of Cols. Content Country of Origin Width Vertical Horizontal Railroaded Weight (oz/in yd) Finish Care Code Flammability Surface Abrasion Tear Strength Tensile Strength Seam Slippage Breaking Strength Colorfastness to Light Crocking Pilling</p>	<p>TUSCANY (re-sampled) 8 44% R, 30% C, 18% P, 7% W, 1% N USA 54" - 137 cm 3.1" (7.9 cm) 0.4" (1 cm) No 15 Teflon S UFAC Class I, Cal. 117 & NFPA 260 15,000 DR Wyzenbeek Cotton Duck Warp: 14 lbf, Filling: 35 lbf Warp: 140 lbf, Filling: 104 lbf Warp: 36 lbf, Filling: 53 lbf Warp: 140 lbf, Filling: 104 lbf Class 5 Wet: Class 4, Dry: Class 5 Class 3.5</p>
	<p>PATTERN Number of Cols. Content Country of Origin Width Vertical Horizontal Railroaded Weight (oz/in yd) Finish Care Code Flammability Surface Abrasion Tear Strength Tensile Strength Seam Slippage Breaking Strength Colorfastness to Light Crocking Pilling</p>	<p>VANGOGH 7 44% P, 31% R, 25% V Italy 55" - 140 cm 15.25" (38.7 cm) 6.875" (17.5 cm) No 11.6 N/A S UFAC Class I, Cal. 117 & MVSS302 15,000 DR Wyzenbeek Cotton Duck N/A N/A N/A N/A N/A N/A N/A</p>
	<p>PATTERN Number of Cols. Content Country of Origin Width Vertical Horizontal Railroaded Weight (oz/in yd) Finish Care Code Flammability Surface Abrasion Tear Strength Tensile Strength Seam Slippage Breaking Strength Colorfastness to Light Crocking Pilling</p>	<p>WARHOL 6 81% R, 19% P USA 54" - 137 cm 2.75" (6.8 cm) 1.125" (2.9 cm) No 13.4 N/A S UFAC Class I, Cal. 117 & NFPA 260 33,000 DR Wyzenbeek Cotton Duck Warp: 10 lbf, Filling: 15 lbf Warp: 110 lbf, Filling: 108 lbf Warp: 34 lbf, Filling: 61 lbf Warp: 110 lbf, Filling: 108 lbf Class 5 Wet: Class 4, Dry: Class 5 Class 3</p>